

SSB

Product Name

Stainless Steel Bumper – Model SSB

Manufacturer

Alvarado Manufacturing Co., Inc.

12660 Colony St.

Chino, CA 91710

Telephone (909) 591-8431

Toll Free 800-423-4143

Fax (909) 628-1403

www.alvaradomfg.com

Email: information@alvaradomfg.com

Product Description: The SSB bumper is designed to provide case and wall protection.

Components:

- The **SSB Rail** is constructed of 1.75" diameter x 16-gauge stainless steel tubing capped at each end with a force fit, impact resistant plastic end cap designed to fit and adhere tightly into the rail. The top of the rail sits 6.75" above the floor.
- The **SSB Stem** is a fully welded assembly constructed of a tapered 2" diameter x 4" long stainless steel tube welded to a 0.75" diameter x 7.5" long stainless steel rod. All welds are ground smooth. Two (2) each 1/4-20 set screws are provided on the underside of each SSB stem assembly in order to secure the stem to the SSB rail.
- The **SSB Socket** is a 0.765" I.D. x 2.8" long high density polyethylene tube with a 1.7" diameter flange at one end. The socket tube is sealed at the other end.

Finishes: The SSB Bumper is available in the following finish:

- **Stainless Steel** – All external fabricated materials are composed of #304 stainless steel and polished to a #4 satin finish.

Size: SSB bumpers have an overall height dimension of 9.5" (6.75" above the floor when installed) and are available in 2', 4', 6', 8', 10', and 12' lengths. The number of SSB Stems provided with each unit varies dependent upon the length of the SSB Bumper. Two (2) stems are provided with each 2', 4', and 6' bumper, three (3) stems are provided with each 8' and 10' bumper, and four (4) stems are provided with each 12' bumper.


Shipping: SSB bumpers are shipped fully assembled. Each SSB bumper includes socket hardware to mount the unit to a standard, level concrete floor. Alvarado ships products throughout the world.

Installation: All SSB bumpers must be installed on level concrete. Installation should be performed by a skilled installer following the manufacturer's directions and instructions (supplied with the bumper).


Corner Section Configurations:

The following is a list of corner section SSB Bumper configurations that are available:

- **90° SSB** – The SSB rail is bent to a 90° angle with a 6" radius. The 90° SSB provides 12" of case protection coverage on each side of the bend. Two (2) stems are provided with each 90° SSB.

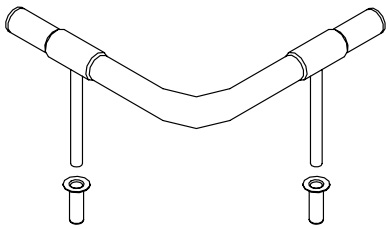

- **135° SSB** – The SSB rail is bent to a 135° angle with a 6" radius. The 135° SSB provides 12" of case protection coverage on each side of the bend. Two (2) stems are provided with each 135° SSB.

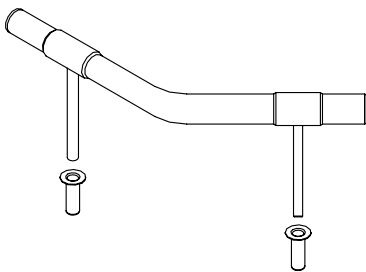

Warranty: Alvarado Manufacturing Co., Inc. warrants the SSB bumper from defects in material or workmanship, for the period of ONE YEAR from date of shipment. Complete details of the warranty are available from Alvarado by request.

Technical Services: Technical information is available from Alvarado Mfg. Co., Inc., and its representatives, distributors and dealers.